

3 4
Telcordia GR-1221-CORE RoHS

-
-
- PDL


-
-
- OTDR

- Telcordia GR-1221-CORE
- RoHS

		3 ports	4 ports

		1310,C,L	C+L	C
(c, 23 , all SOP)	dB	0.8 (P grade); 0.9 (A grade)		
(c, 23 , all SOP)	dB	40	40	40
(Over all , T, all SOP)	dB	35	30	35
	dB	0.1 (P grade);	0.15 (A grade)	0.15 (P grade); 0.2 (A grade)
	dB	50		
	dB	0.2		
	dB	0.2	0.4	0.2
	ps	0.05		
	mW	500		
	dB	50		
		0~+70		
		-40~+85		
	mm	5.5*50;	5.2*38	5.5*64

CIR-□-□-□-□-□-□

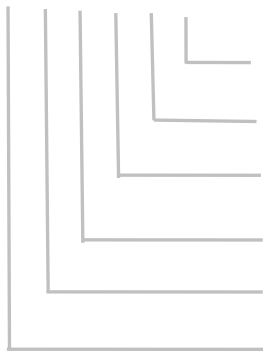

Connector 00: no connector FC SC LC/PC APC

Fiber length 1: 1m customer specify

Fiber Dia. 09: 0.9mm 025: 0.25mm

Grade P: P grade A: A grade

Wavelength 1310: 1310nm 1550: 1550nm

Port Number 3: 3 ports 4: 4 ports

