

10Gbps XFP Optical RTXM226-408

able 10Gbps
 rated with the
 FB laser and
 to INF-8077i
 module is a
 to support

(unless otherwise noted)

Value	
Typ	Max
-	11.3
-	10
-	-1
-	1330
-	-
-	1
-	100
-	10
-	-128
-	1
-	11.3
-	1600
-	-14.4


Overload Input Optical Power - dBm 0.5

10Gbps XFP Optical Transceiver RTXM226-408

Ordering Information

Part No.	Specifications								
	Package	Data rate	Laser	Optical Power	Detector	Sensitivity	Top	Reach	Others
RTXM226-408	XFP	10G	1310nm DFB	-6 ~ -1dBm	PIN	<-14.4dBm	-5~70°C	10km	DDM,RoHS

Block Diagram

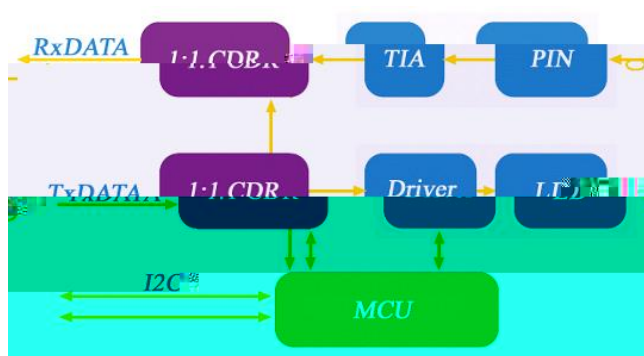

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Supply Voltage	V_{CC3}	V	-0.5	4.0
Storage Temperature	T_s	°C	-40	85
Operating Case Temperature	T_c	°C	-5	70
Relative Humidity (Non condensation)	-	%	5	90

Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Operating Case Temperature	T_c	°C	-5	-	70
Supply Voltage	V_{CC3}	V	3.13	3.3	3.47
Supply Current	I_{CC3}	mA	-	-	650
Power Dissipation	-	W	-	1.7	-

Electrical Characteristics

(Tested under recommended operating conditions, unless otherwise noted)

10Gbps XFP Optical Transceiver RTXM226-408

Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Input Differential Impedance	Rin		-	100	-	
Differential Data Input Swing	Vin,pp	mV	120	-	1000	
Transmit Disable Voltage	VD	V	2.0	-	V _{cc3}	
Transmit Enable Voltage	VEN	V	0	-	+0.8	
Transmit Disable Assert Time	-		-	-	10	
Receiver						
Differential Data Output Swing	Vout,pp	mV	400	-	800	
Data Output Rise Time	Tr	ps	24	-	-	
Data Output Fall Time	Tf	ps	24	-	-	
LOS Fault	-	V	V _{dd3} -0.5	-	V _{dd3}	
LOS Normal	-	V	0	-	+0.5	1
Power Noise Output	-		-	-	-	2
Note1: V _{dd3} is host +3.3V power supply.						
Note2: Compliant with INF 8077i XFP MSA section 2.7.1.						

Low Speed Electrical Interface

Parameter	Symbol	Unit	Min	Max	Note
XFP Tx_Dis,P_Down/RST	V _{IH}	V	2.0	V _{cc3} +0.3	
	V _{IL}	V	-0.3	0.8	
XFP Interrupt,Mod_NR,Rx_Los	V _{OH}	V	V _{dd3} -0.5	V _{dd3} +0.3	1
	V _{OL}	V	0.0	0.4	
XFP SCL and SDA Input	V _{IH}	V	V _{dd3} *0.7	V _{dd3} +0.5	1
	V _{IL}	V	-0.3	V _{dd3} *0.3	
XFP SCL and SDA Output	V _{OH}	V	V _{dd3} -0.5	V _{dd3} +0.3	
	V _{OL}	V	0.0	0.4	
Leakage Current	I _L		-10	10	
I ² C Clock Rate	-	KHz	-	400	
Note1: V _{dd3} is host +3.3V power supply.					

Pin Description

10Gbps XFP Optical Transceiver RTXM226-408

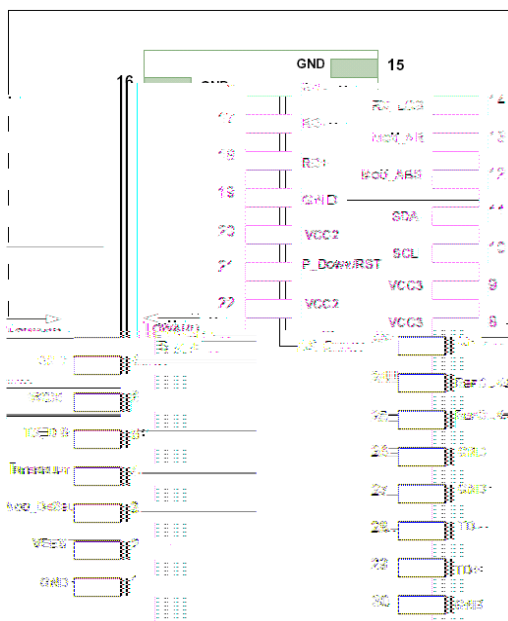


Figure 2.Pin function definitions

Table 1: Transceiver pin descriptions

Pin	Logic	Symbol	Name/Description	Note
1		GND	Module Ground	1
2		VEE5	Optional -5.2V Power Supply (Not Required)	
3	LVTTTL-I	Mod_DeSel	Module De-select; When held low allows module to respond to 2-wire serial interface	
4	LVTTTL-O	Interrupt		

10Gbps XFP Optical Transceiver RTXM226-408


21	LVTTTL-I	P_Down/RST	Power down; When high, requires the module to limit power consumption to 1.5W or below. 2-Wire serial interface must be functional in the low power mode. Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply (Not Required)	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock Non-Inverted Input, AC coupled on the host board (Not Required)	
25	PECL-I	RefCLK-	Reference Clock Inverted Input, AC coupled on the host board (Not Required)	
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter Inverted Data Input	
29	CML-I	TD+	Transmitter Non-Inverted Data Input	
30		GND	Module Ground	1

Note1: Module ground pins GND are isolated from the module case and chassis ground within the module.
Note2: Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.

Digital Diagnostic Functions


As defined by the XFP MSA, digital diagnostic functions are provided via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver Temperature
- Tx Bias Current
- Tx Optical Power
- RX Received Optical Power
- Transceiver +3.3V Supply Voltage

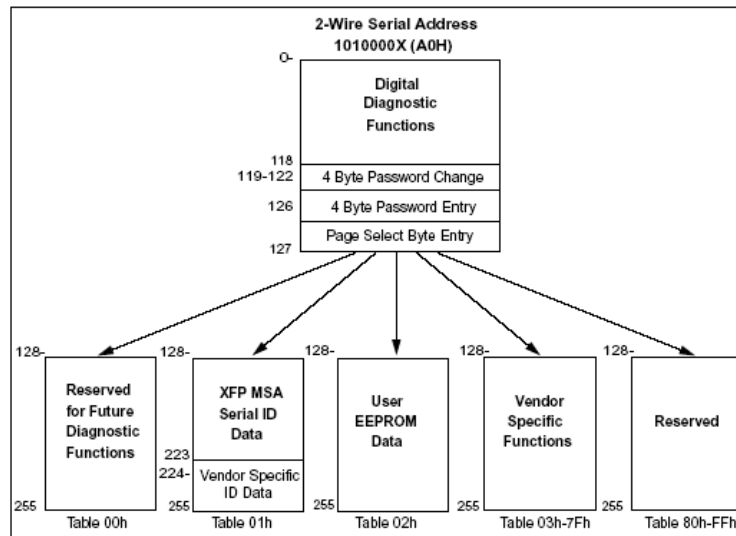


10Gbps XFP Optical Transceiver RTXM226-408

Typical Application Circuit for Power Supply

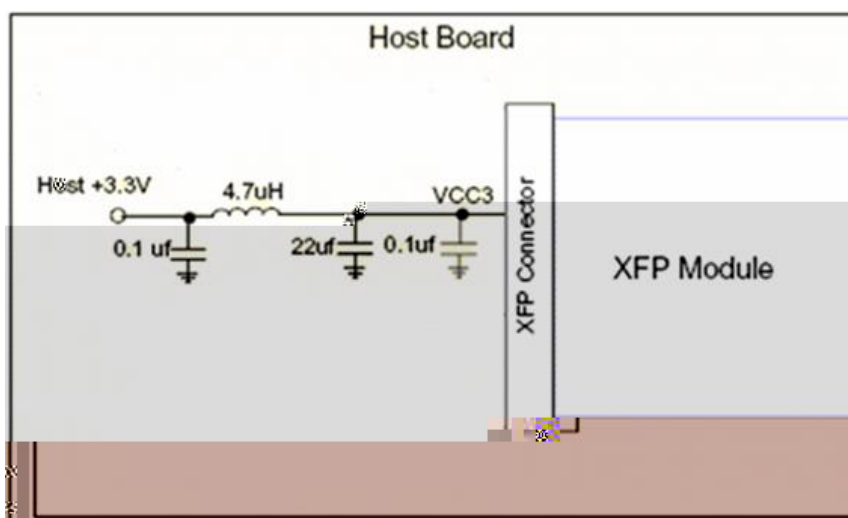

Package Outline

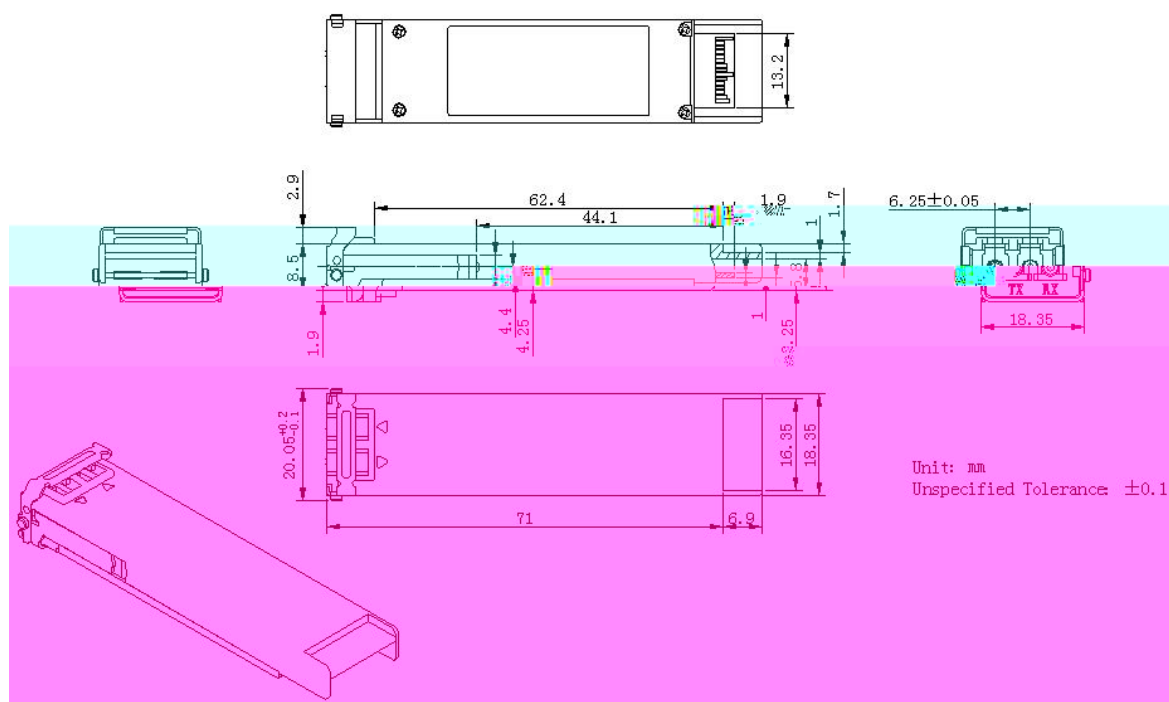

Regulatory Compliance

Feature	Test Method	Performance
Laser Eye Safety	FDA 21 CFR 1040.10 and 1040.11 IEC 60825-1: 1994+ A11: 1996+ A2: 2001 IEC 60825-2: 2004 + A1: 2006 EN 60825-1:1994+A1:2002+A2:2001	Compliant with Class 1 laser product

10Gbps XFP Optical Transceiver RTXM226-408

	EN 60825-2: 2004	
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7 Human Body Model	Class 1 (>1.5kV)
Electrostatic Discharge (ESD) Immunity	IEC 61000-4-2: 2001	Class 2 (>4.0kV)
Electromagnetic Interference (EMI)	FCC Part 15 Subpart J Class B CISPR22:1997+A1:2000+A2:2002, Class B EN55022:1998+A1:2000+A2:2003, Class B	Compliant with standards