


P - a F b S c M

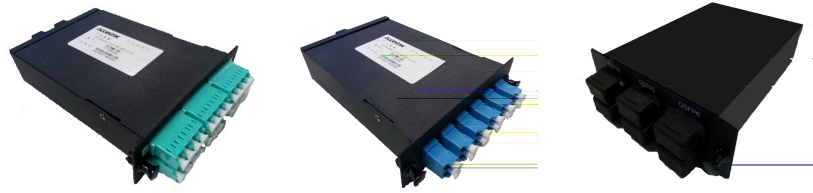

I  
M /M O M 8,12,24 . A  
LC, C,FC, M /M O  
ODF  
(MDA) (EDA)

- F
- - -
  - M , , - -
  - F
  - E M O-LC 12 24
  - A , OM1, OM2, OM3,  
OM4, G652D, G657A1 G657A2

- A
- 1 /4
  - C M O LC
  - N

- IA/EIA-568-C.3
- IEC 61754-7
- IEC 61754-20
- G -1435-CO E
- G -326-CO E

Connector Type	Insertion Loss(Average)	Insertion Loss(Max)	Return Loss	Unit
MPO(MM)	0.10	0.30	25	B