




OSP1200



OSP2100



OSP2200

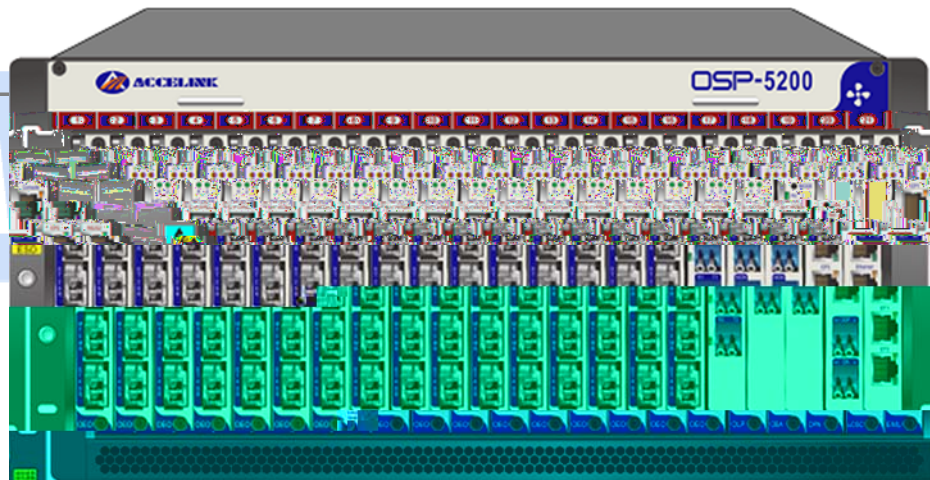

OSP5200

OSP

-
- -48V 220V -48V 220V
- UDP,WEB,CLI,TLI,SNMP
- 200G 100G 10G 2.5G /
-
-
-
- OTDR
- 400km

442	350	44	mm	442	350	88	mm	442	320	220	mm
						19					
						21					
			4				8			2	20
			135W				200W			400W	
						1					
				-48V DC		220V AC		-48V DC+220V AC			
				-10		~ 50					
				-20		~ 80					
				5%		~ 95%					