
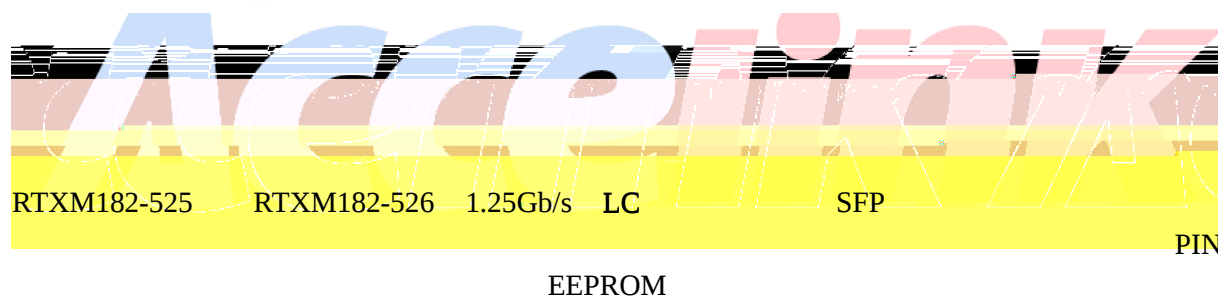


1.25Gb/s 20km SFP

RTXM182-525 & RTXM182-526

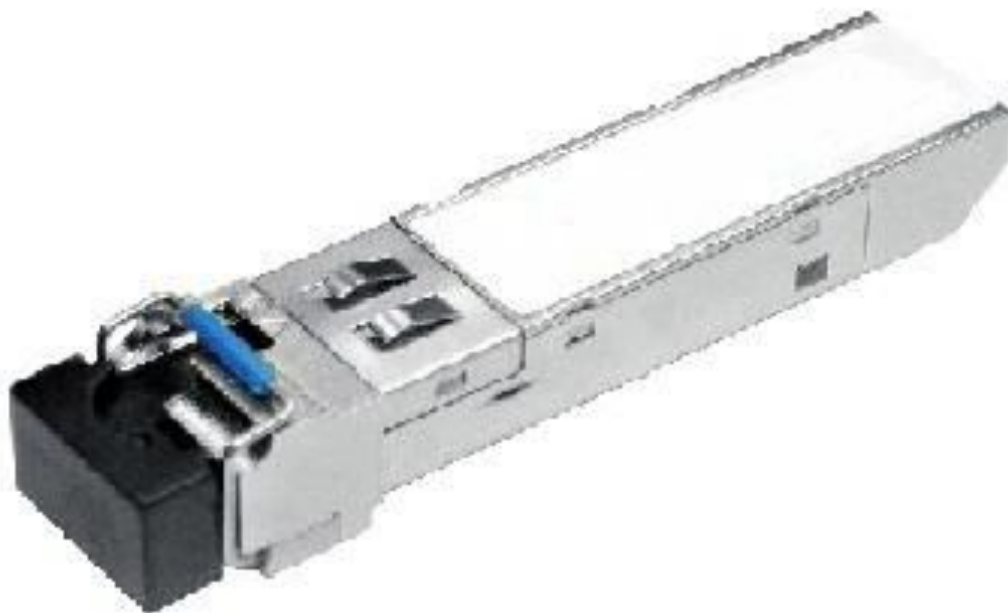

- SFP MSA (INF-8074i)
- IEEE802.3ah
- ITU-T G.957

参数		符号	单位	最小	典型	最大	备注
		Icc	mA	-	-	300	1
			mV	150	-	1100	
			mV	300	-	600	
TX_fault /LOS	(TTL)	VOH	V	2.0	-	Vcc	
		VOL		0	-	0.8	
TX_disable	(TTL)	VOH	V	2.0	-	Vcc	
		VOL		0	-	0.8	
1.25G BIDI SFP							
Po				-9	-3	-1	
		λc	nm	1260	1310	1360	FP-LD
				1480	1490	1500	DFB-LD
		EX	dB	9			
(RMS)		Δλ	nm	3			1310nmFP-LD
(20dB)		Δλ	nm	3			1490nmDFB-LD
			dB	30			
		Tp-p	ps	267			2
		RIN	dB/Hz	-120			
IEEE802.3ah							
		Poff	dBm	-	-	-45	
		λc	nm	1480	1500		
				1260	1360		
		S	dBm	-21			
		Pin	dBm	-3			
			dB	-22			
				-35			
			dB	0.5	3	5	
			dB	1			

备注 1.

备注 2. 1.25Gbps 23

型号	规格								应用
RTXM182-525	SFP	1.25G	1310nm FP-LD	-9~-3 dBm	PIN 1490nm	< -21dBm	-40~85° C	20km	GE
RTXM182-526	SFP	1.25G	1490nm DFB-LD	-9~-3 dBm	PIN 1310nm	< -21dBm	-40~85° C	20km	GE

