
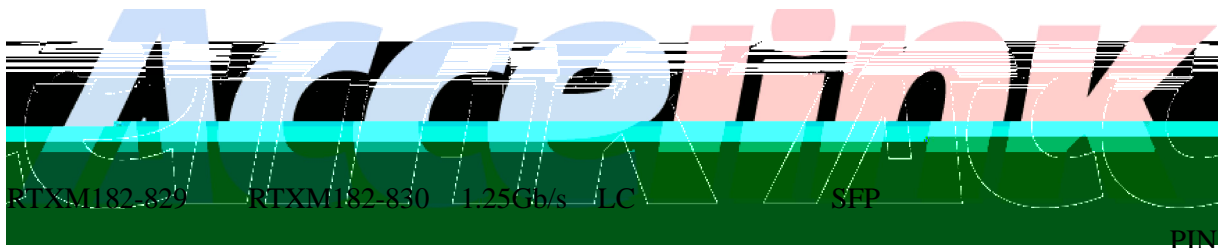


1. 25Gb/s 40km SFP

RTXM182-829 & RTXM182-830

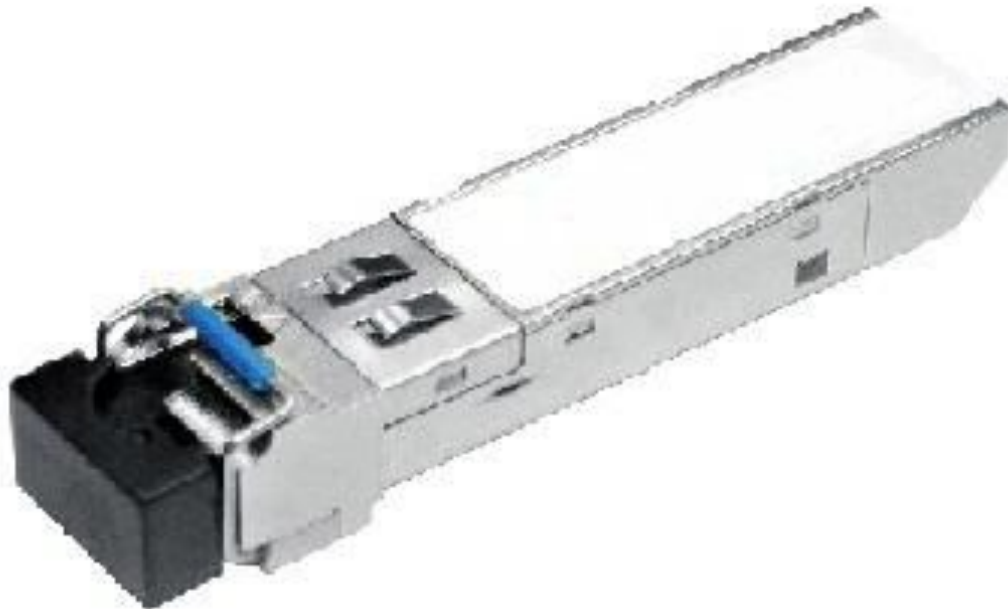


EEPROM

- LC
- 3.3V
- 1.25Gb/s
- PECL
-
- 40
- : -40°C ~+85°C
- RoHS

-
- -
-
-

- SFP MSA (INF-8074i)
- IEEE802.3ah
- ITU-T G.957

参数

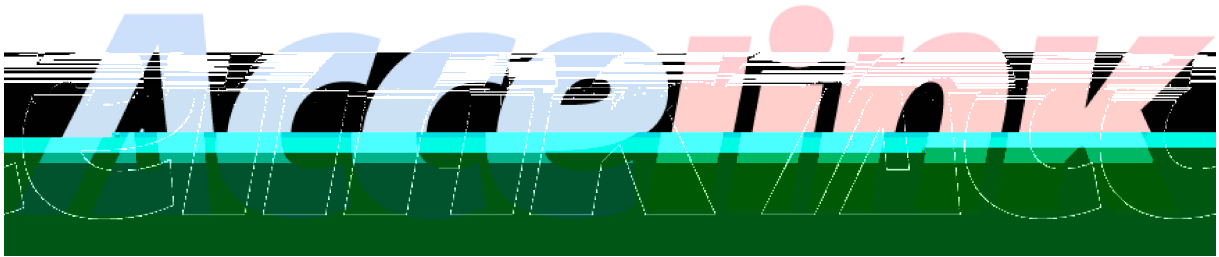

备注 1.

备注 2. 1.25Gbps 23

型号	规格								应用
RTXM182-829	SFP	1.25G	1310nm DFB-LD	-3~+2 dBm	PIN 1490nm	< -24dBm	-40~85° C	40km	GE
RTXM182-830	SFP	1.25G	1490nm DFB-LD	-3~+2 dBm	PIN 1310nm	< -24dBm	-40~85° C	40km	GE

