

10Gbps XFP Optical Transceiver RTX226-480

Ordering Information

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min	Max
Supply Voltage 1	V _{CC3}	V	-0.5	4.0
Supply Voltage 2	V _{CC5}	V	-0.5	6.0
Storage Temperature	T _s	°C	-40	85
Operating Case Temperature	T _c	°C	-5	70
Relative Humidity (Non condensation)	-	%	5	90

Recommended Operating Conditions

ansceiver RTX226-480

Symbol	Unit	Min	Max	Note
V_{IH}	V	2.0	$V_{cc3}+0.3$	
V_{IL}	V	-0.3	0.8	
V_{OH}	V	$V_{dd3}-0.5$	$V_{dd3}+0.3$	1
V_{OL}	V	0.0	0.4	
V_{IH}	V	$V_{dd3} * 0.7$	$V_{dd3} + 0.5$	

10Gbps XFP Optical Transceiver RTX226-480

Pin	Logic	Symbol	Name/Description	Note
1		GND	Module Ground	1
2		VEE5	Optional -5.2V Power Supply (Not Required)	
3	LVTTTL-I	Mod_DeSel	Module De-select; When held low allows module to respond to 2-wire serial interface	
4	LVTTTL-O	Interrupt	Interrupt; Indicates presence of an important condition which can be read over the 2-wire serial interface	2
5	LVTTTL-I	TX_DIS	Transmitter Disable; Turns off transmitter laser output	
6		VCC5	+5V Power Supply	
7		GND	Module Ground	1
8		VCC3	+3.3V Power Supply	
9		VCC3	+3.3V Power Supply	
10	I/O	SCL	2-Wire Serial Interface Clock	2
11	I/O	SDA	2-Wire Serial Interface Data Line	2
12	LVTTTL-O	Mod_Abs	Indicates Module is not present. Grounded in the Module	2
13	LVTTTL-O	Mod_NR	Module Not Ready; Indicating Module Operational Fault	2
14	LVTTTL-O	RX_LOS	Receiver Loss Of Signal Indicator	2
15		GND	Module Ground	1
16		GND	Module Ground	1
17	CML-O	RD-	Receiver Inverted Data Output	
18	CML-O	RD+	Receiver Non-Inverted Data Output	
19		GND	Module Ground	1
20		VCC2	+1.8V Power Supply (Not Required)	
21	LVTTTL-I	P_Down/RST	Power down; When high, requires the module to limit power consumption to 1.5W or below. 2-Wire serial interface must be functional in the low power mode. Reset; The falling edge initiates a complete reset of the module including the 2-wire serial interface, equivalent to a power cycle.	
22		VCC2	+1.8V Power Supply (Not Required)	
23		GND	Module Ground	1
24	PECL-I	RefCLK+	Reference Clock Non-Inverted Input, AC coupled on the host board (Not Required)	
25	PECL-I	RefCLK-	Reference Clock Inverted Input, AC coupled on the host board (Not Required)	
26		GND	Module Ground	1
27		GND	Module Ground	1
28	CML-I	TD-	Transmitter Inverted Data Input	
29	CML-I	TD+	Transmitter Non-Inverted Data Input	
30		GND	Module Ground	1

Note1: Module ground pins GND are isolated from the module case and chassis ground within the module.


Note2: Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.

10Gbps XFP Optical Transceiver RTX226-480


Digital Diagnostic Functions

As defined by the XFP MSA, digital diagnostic functions are provided via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver Temperature
- Tx Bias Current
- Tx Optical Power
- RX Received Optical Power
- Transceiver +3.3V Supply Voltage
- Laser Temperature

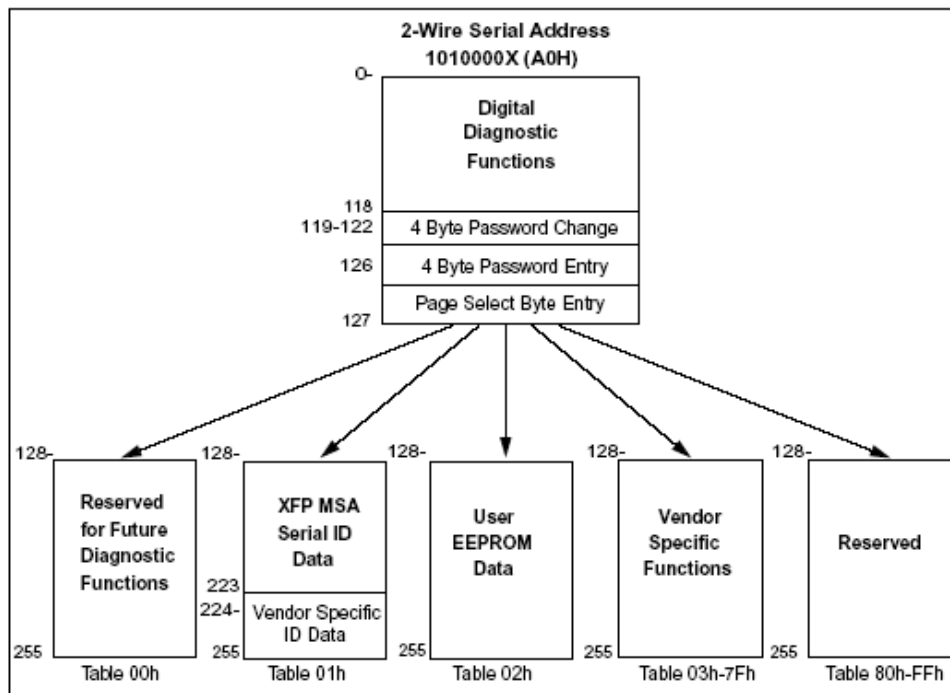


Typical Application Circuit for Power Supply

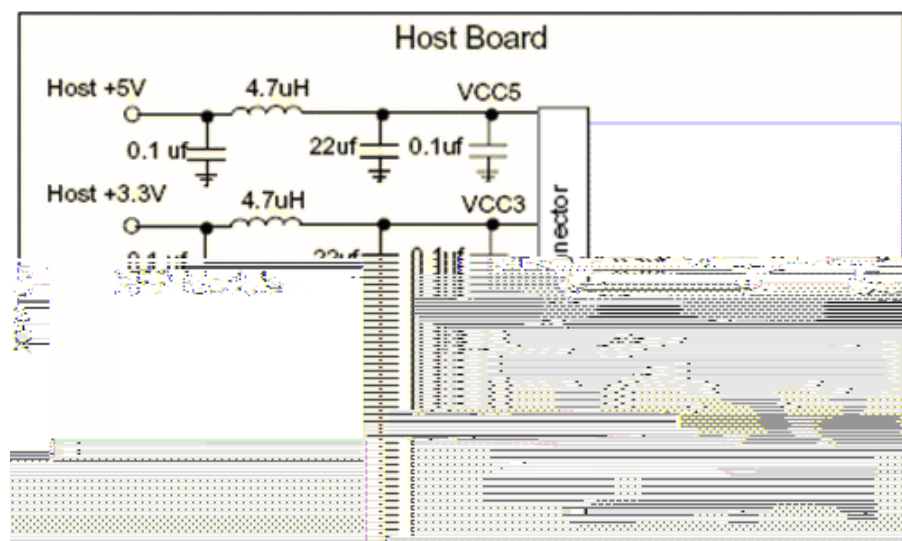

10Gbps XFP Optical Transceiver RTX226-480

Package Outline

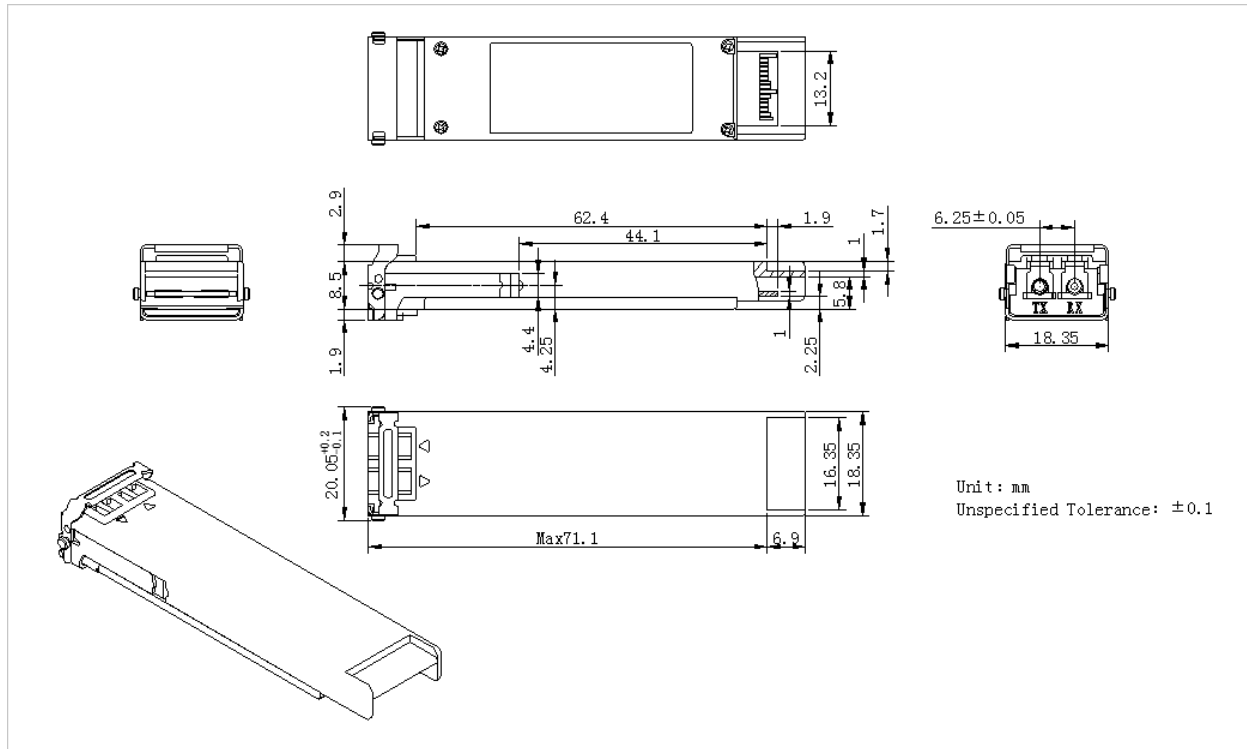

Regulatory Compliance

Feature	Test Method	Performance
Laser Eye Safety	FDA 21 CFR 1040.10 and 1040.11 IEC 60825-1: 1994+ A11: 1996+ A2: 2001 IEC 60825-2: 2004 + A1: 2006 EN 60825-1:1994+A1:2002+A2:2001 EN 60825-2: 2004	Compliant with Class 1 laser product
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7 Human Body Model	Class 1 (>1.5kV)
Electrostatic Discharge (ESD) Immunity	IEC 61000-4-2: 2001	Class 2 (>4.0kV)
Electromagnetic Interference (EMI)	FCC Part 15 Subpart J Class B CISPR22:1997+A1:2000+A2:2002, Class B EN55022:1998+A1:2000+A2:2003, Class B	Compliant with standards